



P-Channel 20-V (D-S) MOSFET

These miniature surface mount MOSFETs utilize a high cell density trench process to provide low $r_{DS(on)}$ and to ensure minimal power loss and heat dissipation. Typical applications are DC-DC converters and power management in portable and battery-powered products such as computers, printers, PCMCIA cards, cellular and cordless telephones.

- Low $r_{DS(on)}$ provides higher efficiency and extends battery life
- Low thermal impedance copper leadframe TSOP-6 saves board space
- Fast switching speed
- High performance trench technology



PRODUCT SUMMARY

V_{DS} (V)	$r_{DS(on)}$ m(Ω)	I_D (A)
-20	90 @ $V_{GS} = -4.5V$	-2.9
	130 @ $V_{GS} = -2.5V$	-2.5
	150 @ $V_{GS} = -1.8V$	-2.3

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ C$ UNLESS OTHERWISE NOTED)

Parameter		Symbol	Maximum	Units
Drain-Source Voltage		V_{DS}	-20	V
Gate-Source Voltage		V_{GS}	± 12	
Continuous Drain Current ^a	$T_A = 25^\circ C$	I_D	-2.9	A
	$T_A = 70^\circ C$		-2.4	
Pulsed Drain Current ^b		I_{DM}	± 16	
Continuous Source Current (Diode Conduction) ^a		I_S	-1.0	A
Power Dissipation ^a	$T_A = 25^\circ C$	P_D	2.0	W
	$T_A = 70^\circ C$		1.3	
Operating Junction and Storage Temperature Range		T_J, T_{stg}	-55 to 150	$^\circ C$

THERMAL RESISTANCE RATINGS

Parameter		Symbol	Maximum	Units
Maximum Junction-to-Ambient ^a	$t \leq 5$ sec	$R_{\theta JA}$	62.5	$^\circ C/W$
			110	$^\circ C/W$

Notes

- Surface Mounted on 1" x 1" FR4 Board.
- Pulse width limited by maximum junction temperature

SPECIFICATIONS (T _A = 25°C UNLESS OTHERWISE NOTED)						
Parameter	Symbol	Test Conditions	Limits			Unit
			Min	Typ	Max	
Static						
Gate-Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = -250 uA	-0.7			
Gate-Body Leakage	I _{GSS}	V _{DS} = 0 V, V _{GS} = ±12 V			±100	nA
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} = -16 V, V _{GS} = 0 V			-1	uA
		V _{DS} = -16 V, V _{GS} = 0 V, T _J = 55°C			-5	
On-State Drain Current ^A	I _{D(on)}	V _{DS} = -4.5 V, V _{GS} = -4.5 V	-10			A
Drain-Source On-Resistance ^A	r _{DS(on)}	V _{GS} = -4.5 V, I _D = -3.3 A			90	mΩ
		V _{GS} = -2.5 V, I _D = -2.9 A			130	
		V _{GS} = -1.8 V, I _D = -2.3 A			150	
Forward Tranconductance ^A	g _{fs}	V _{DS} = -10 V, I _D = -4.9 A		8.0		S
Diode Forward Voltage	V _{SD}	I _S = 1.7 A, V _{GS} = 0 V		-0.8		V
Dynamic ^b						
Total Gate Charge	Q _g	V _{DS} = -10 V, V _{GS} = -4.5 V, I _D = -4.9 A		8		nC
Gate-Source Charge	Q _{gs}			1.8		
Gate-Drain Charge	Q _{gd}			1.9		
Turn-On Delay Time	t _{d(on)}	V _{DD} = -10 V, R _L = 6 Ω , I _D = -1 A, VGEN = -4.5 V		22		nS
Rise Time	t _r			35		
Turn-Off Delay Time	t _{d(off)}			45		
Fall-Time	t _f			25		

Notes

- Pulse test: $PW \leq 300\mu\text{s}$ duty cycle $\leq 2\%$.
- Guaranteed by design, not subject to production testing.

Typical Electrical Characteristics

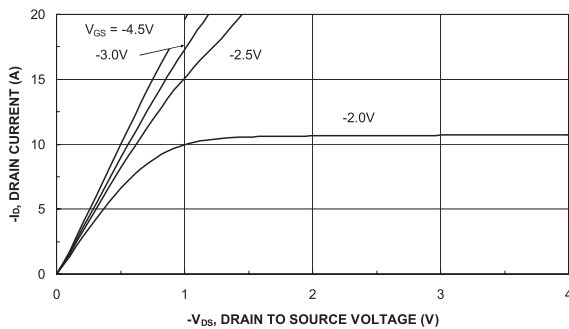


Figure 1. Output Characteristics

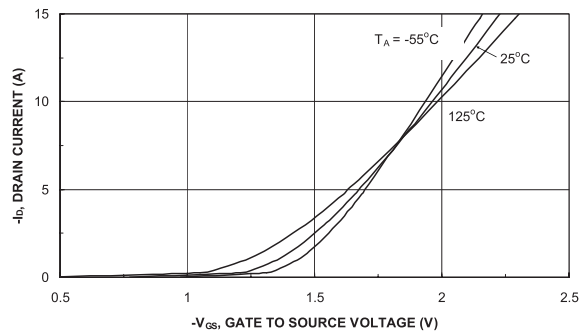


Figure 2. Transfer Characteristics

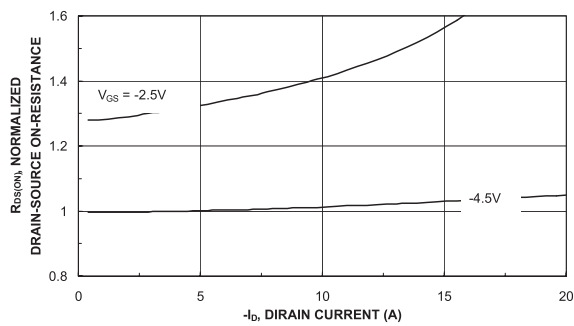


Figure 3. On-Resistance vs. Drain Current

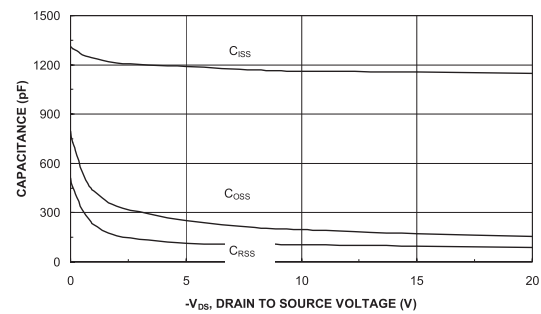


Figure 4. Capacitance

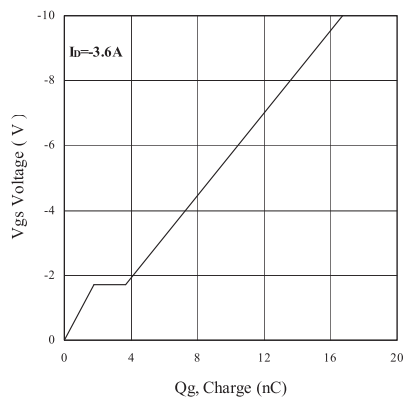


Figure 5. Gate Charge

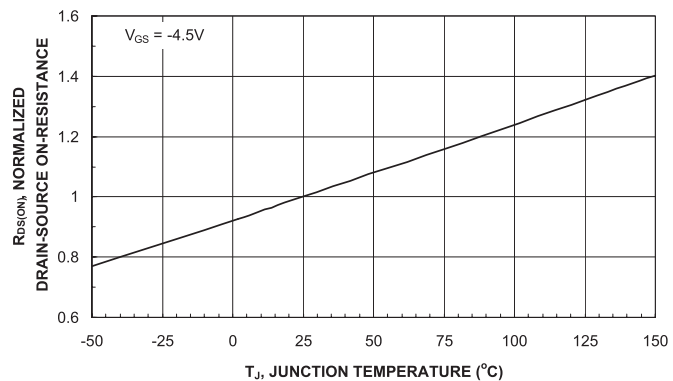


Figure 6. On-Resistance vs. Junction Temperature

Typical Electrical Characteristics

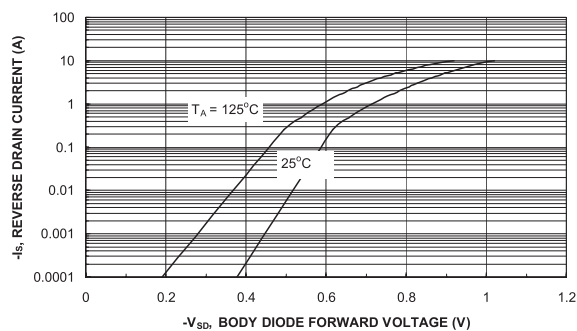


Figure 7. Source-Drain Diode Forward Voltage

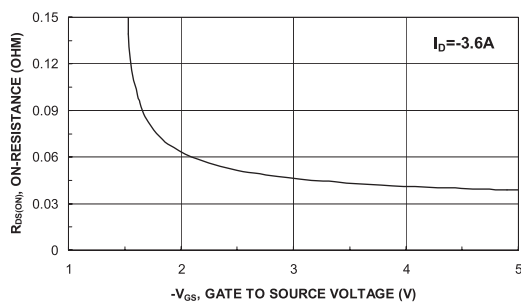


Figure 8. On-Resistance with Gate to Source Voltage

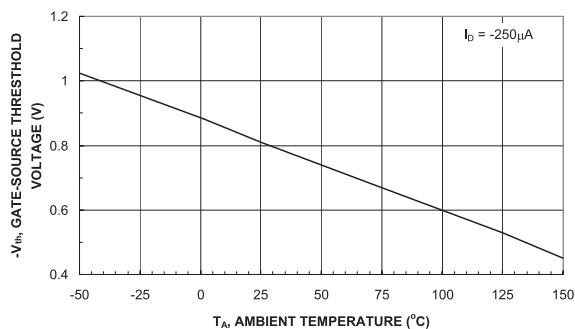


Figure 9. Vth Gate to Source Voltage Vs Temperature

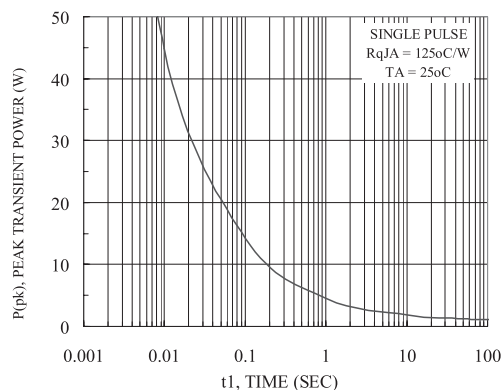


Figure 10. Single Pulse Maximum Power Dissipation

Normalized Thermal Transient Junction to Ambient


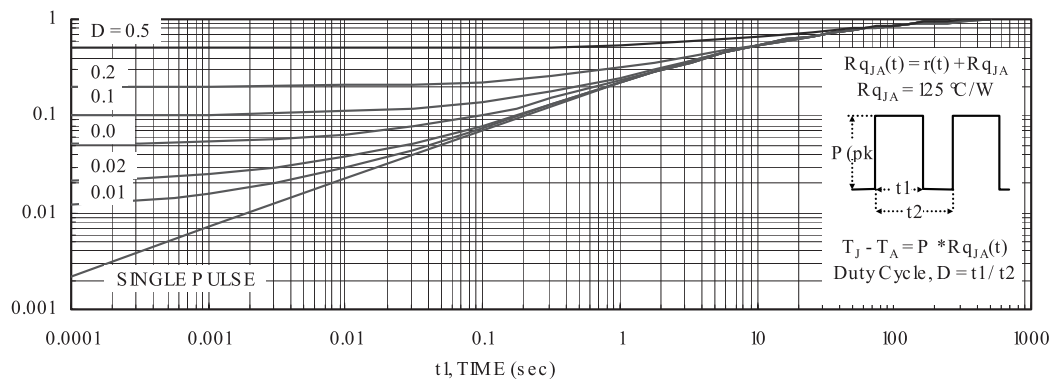


Figure 11. Transient Thermal Response Curve

Package Information

TSOP-6: 6LEAD

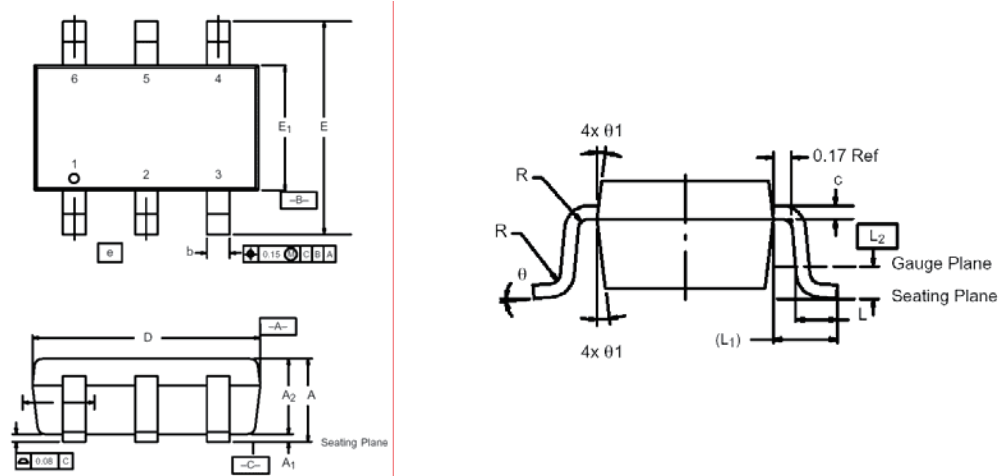

Dim	MILLIMETERS			INCHES		
	Min	Nom	Max	Min	Nom	Max
A	0.91	—	1.10	0.036	—	0.043
A ₁	0.01	—	0.10	0.0004	—	0.004
A ₂	0.84	—	1.00	0.033	0.038	0.039
b	0.30	0.32	0.45	0.012	0.013	0.018
c	0.10	0.15	0.20	0.004	0.006	0.008
D	2.95	3.05	3.10	0.116	0.120	0.122
E	2.70	2.85	2.98	0.106	0.112	0.117
E ₁	1.55	1.65	1.70	0.061	0.065	0.067
e	1.00 BSC			0.0394 BSC		
L	0.35	—	0.50	0.014	—	0.020
L ₁	0.60 Ref			0.024 Ref		
L ₂	0.25 BSC			0.010 BSC		
R	0.10	—	—	0.004	—	—
θ	0°	4°	8°	0°	4°	8°
θ ₁	7° Nom			7° Nom		