


N-Channel 20-V (D-S) MOSFET

These miniature surface mount MOSFETs utilize High Cell Density process. Low $r_{DS(on)}$ assures minimal power loss and conserves energy, making this device ideal for use in power management circuitry. Typical applications are PWMDC-DC converters, power management in portable and battery-powered products such as computers, printers, battery charger, telecommunication power system, and telephones power system.

- Low $r_{DS(on)}$ Provides Higher Efficiency and Extends Battery Life
- Miniature SO-8 Surface Mount Package Saves Board Space
- High power and current handling capability
- Low side high current DC-DC Converter applications



PRODUCT SUMMARY

V_{DS} (V)	$r_{DS(on)}$ m(Ω)	I_D (A)
20	22 @ $V_{GS} = 4.5V$	7.8
	28 @ $V_{GS} = 2.5V$	7.0

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ C$ UNLESS OTHERWISE NOTED)

Parameter		Symbol	Limit	Units
Drain-Source Voltage		V_{DS}	20	V
Gate-Source Voltage		V_{GS}	± 8	
Continuous Drain Current ^a	$T_A = 25^\circ C$	I_D	7.8	A
	$T_A = 70^\circ C$		6.4	
Pulsed Drain Current ^b		I_{DM}	± 50	
Continuous Source Current (Diode Conduction) ^a		I_S	2.3	A
Power Dissipation ^a	$T_A = 25^\circ C$	P_D	2.0	W
	$T_A = 70^\circ C$		1.3	
Operating Junction and Storage Temperature Range		T_J, T_{stg}	-55 to 150	$^\circ C$

THERMAL RESISTANCE RATINGS

Parameter		Symbol	Maximum	Units
Maximum Junction-to-Ambient ^a	$t \leq 10$ sec	$R_{\theta JA}$	62.5	$^\circ C/W$
	Steady-State		110	$^\circ C/W$

Notes

- Surface Mounted on 1" x 1" FR4 Board.
- Pulse width limited by maximum junction temperature



SPECIFICATIONS (T _A = 25°C UNLESS OTHERWISE NOTED)						
Parameter	Symbol	Test Conditions	Limits			Unit
			Min	Typ	Max	
Static						
Gate-Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = 250 uA	0.7			
Gate-Body Leakage	I _{GSS}	V _{DS} = 0 V, V _{GS} = ±8 V			±100	nA
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} = 24 V, V _{GS} = 0 V			1	uA
		V _{DS} = 24 V, V _{GS} = 0 V, T _J = 55°C			25	
On-State Drain Current ^A	I _{D(on)}	V _{DS} = 5 V, V _{GS} = ±8 V	20			A
Drain-Source On-Resistance ^A	r _{DS(on)}	V _{GS} = 4.5 V, I _D = 6.5 A			22	mΩ
		V _{GS} = 2.5 V, I _D = 5.8 A			28	
Forward Tranconductance ^A	g _s	V _{DS} = 15 V, I _D = 6.5 A		40		S
Diode Forward Voltage	V _{SD}	I _S = 2.3 A, V _{GS} = 0 V		0.7		V
Dynamic ^b						
Total Gate Charge	Q _g	V _{DS} = 15 V, V _{GS} = 4.5 V, I _D = 6.5 A		5.5		nC
Gate-Source Charge	Q _{gs}			1.0		
Gate-Drain Charge	Q _{gd}			1.4		
Turn-On Delay Time	t _{d(on)}	V _{DD} = 25 V, R _L = 25 Ω , I _D = 1 A, V _{GEN} = 10 V		20		nS
Rise Time	t _r			9		
Turn-Off Delay Time	t _{d(off)}			70		
Fall-Time	t _f			20		

Notes

- a. Pulse test: $PW \leq 300 \mu\text{s}$ duty cycle $\leq 2\%$.

Package Information

SO-8: 8LEAD

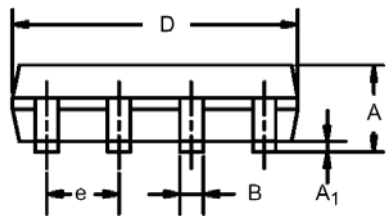

Dim	MILLIMETERS		INCHES	
	Min	Max	Min	Max
A	1.35	1.75	0.053	0.069
A ₁	0.10	0.20	0.004	0.008
B	0.35	0.51	0.014	0.020
C	0.19	0.25	0.0075	0.010
D	4.80	5.00	0.189	0.196
E	3.80	4.00	0.150	0.157
e	1.27 BSC		0.050 BSC	
H	5.80	6.20	0.228	0.244
h	0.25	0.50	0.010	0.020
L	0.50	0.93	0.020	0.037
q	0°	8°	0°	8°

