




P-Channel 60-V (D-S) MOSFET

These miniature surface mount MOSFETs utilize a high cell density trench process to provide low $r_{DS(on)}$ and to ensure minimal power loss and heat dissipation. Typical applications are DC-DC converters and power management in portable and battery-powered products such as computers, printers, PCMCIA cards, cellular and cordless telephones.

PRODUCT SUMMARY		
V_{DS} (V)	$r_{DS(on)}$ (Ω)	I_D (A)
-60	0.120 @ $V_{GS} = -10V$	3.5
	0.180 @ $V_{GS} = -4.5V$	2.8

- Low $r_{DS(on)}$ provides higher efficiency and extends battery life
- Low thermal impedance copper leadframe SOIC-8 saves board space
- Fast switching speed
- High performance trench technology



ABSOLUTE MAXIMUM RATINGS (T _A = 25°C UNLESS OTHERWISE NOTED)				
Parameter		Symbol	Maximum	Units
Drain-Source Voltage		V_{DS}	-60	V
Gate-Source Voltage		V_{GS}	±20	
Continuous Drain Current ^a	$T_A = 25^\circ C$	I_D	3.5	A
	$T_A = 70^\circ C$		2.8	
Pulsed Drain Current ^b		I_{DM}	±15	
Continuous Source Current (Diode Conduction) ^a		I_S	-1.7	A
Power Dissipation ^a	$T_A = 25^\circ C$	P_D	2.1	W
	$T_A = 70^\circ C$		1.3	
Operating Junction and Storage Temperature Range		T_J, T_{stg}	-55 to 150	°C

THERMAL RESISTANCE RATINGS				
Parameter		Symbol	Maximum	Units
Maximum Junction-to-Ambient	t ≤ 10 sec	$R_{\theta JA}$	62.5	°C/W
	Steady State		110	°C/W

Notes


- Surface Mounted on 1" x 1" FR4 Board.
- Pulse width limited by maximum junction temperature

SPECIFICATIONS (T _A = 25°C UNLESS OTHERWISE NOTED)						
Parameter	Symbol	Test Conditions	Limits			Unit
			Min	Typ	Max	
Static						
Gate-Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = -250 uA	-1			
Gate-Body Leakage	I _{GSS}	V _{DS} = 0 V, V _{GS} = ±20 V			±100	nA
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} = -48 V, V _{GS} = 0 V			-1	uA
		V _{DS} = -48 V, V _{GS} = 0 V, T _J = 55°C			-10	
On-State Drain Current ^A	I _{D(on)}	V _{DS} = -5 V, V _{GS} = -10 V	-20			A
Drain-Source On-Resistance ^A	r _{DS(on)}	V _{GS} = -10 V, I _D = -3.5 A			120	mΩ
		V _{GS} = -4.5 V, I _D = -2.8 A			180	
Forward Tranconductance ^A	g _{fs}	V _{DS} = -15 V, I _D = -3.5 A		8		S
Diode Forward Voltage	V _{SD}	I _S = -2.5 A, V _{GS} = 0 V			-1.2	V
Dynamic ^B						
Total Gate Charge	Q _g	V _{DS} = -15 V, V _{GS} = -4.5 V, I _D = -3.5 A		5.5		nC
Gate-Source Charge	Q _{gs}			1.7		
Gate-Drain Charge	Q _{gd}			1.5		
Turn-On Delay Time	t _{d(on)}	V _{DD} = -30 V, R _L = 30Ω, I _D = -1 A, R _G = 6Ω		7		nS
Rise Time	t _r			9		
Turn-Off Delay Time	t _{d(off)}			19		
Fall-Time	t _f			4		


Notes

- Pulse test: PW ≤ 100 μs duty cycle ≤ 2%.
- Guaranteed by design, not subject to production testing.


Typical Electrical Characteristics

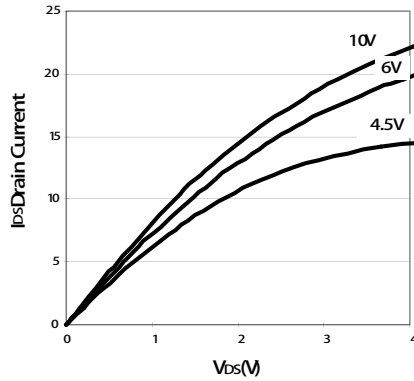


Output Characteristics

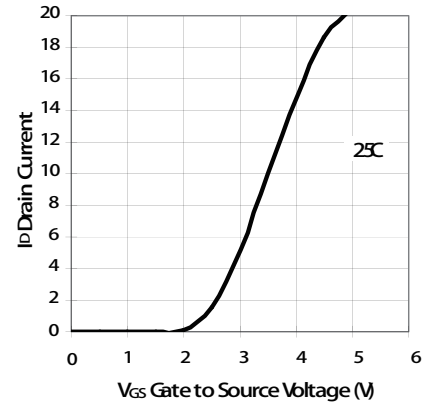


Transfer Characteristics

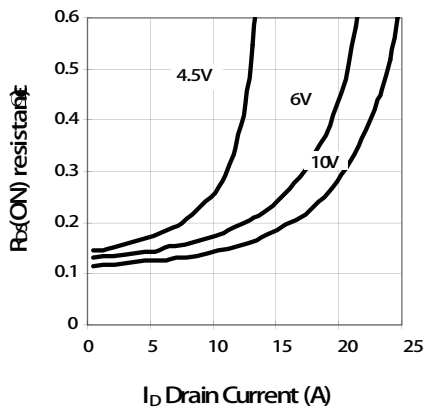


On-Resistance vs. Drain Current

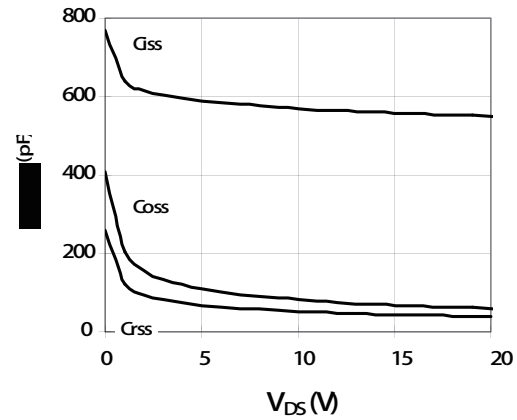


Capacitance

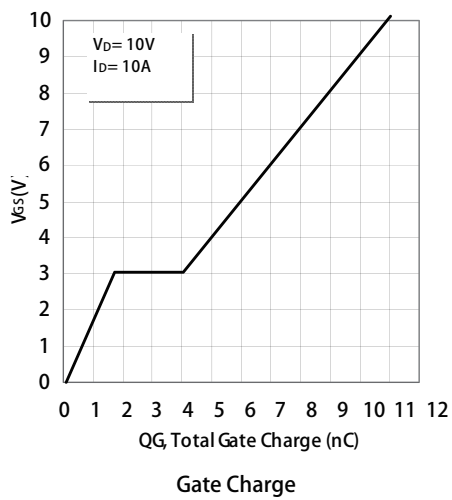


$r_{DS(ON)}$ - On-Resistance

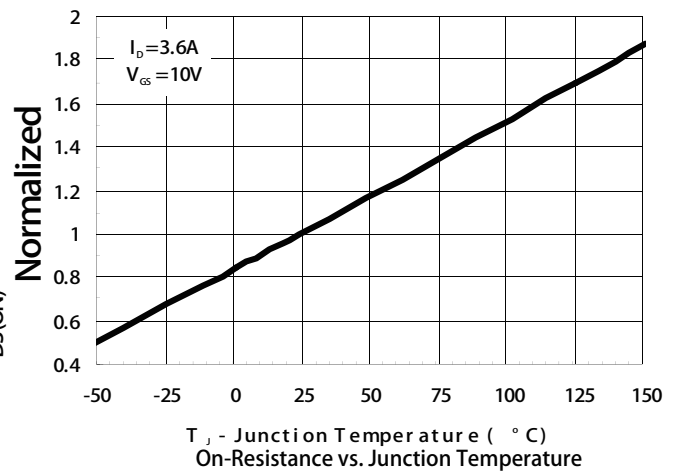


Typical Electrical Characteristics

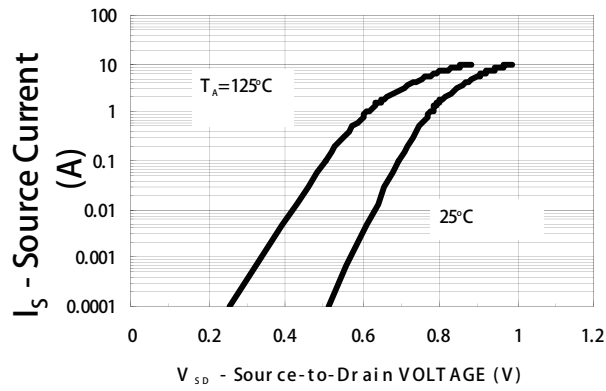


Source-Drain Diode Forward Voltage

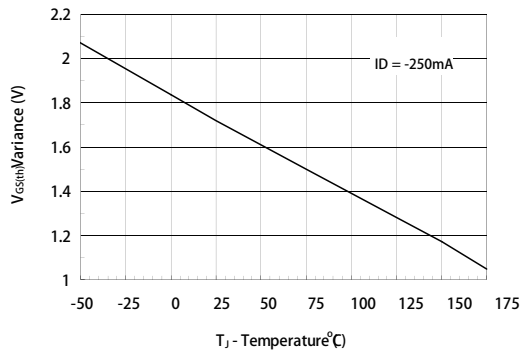


Threshold Voltage

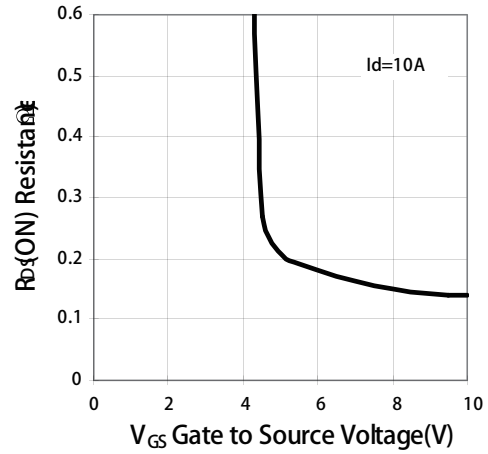

On-Resistance vs. Gate-to-Source Voltage

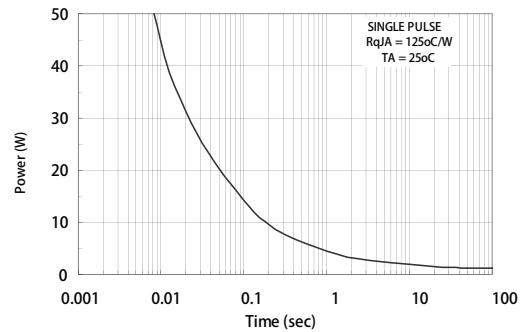



Single Pulse Power

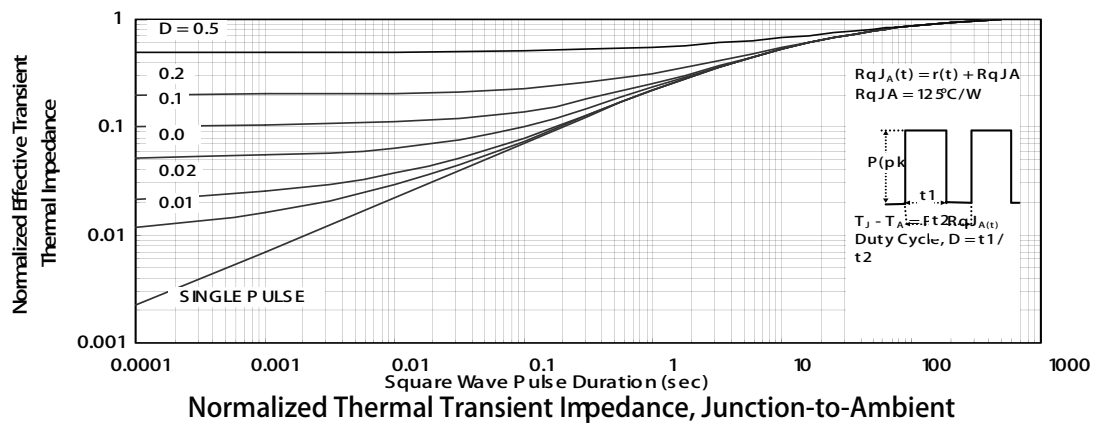

Normalized Thermal Transient Impedance, Junction-to-Ambient

Package Information

SO-8: 8LEAD

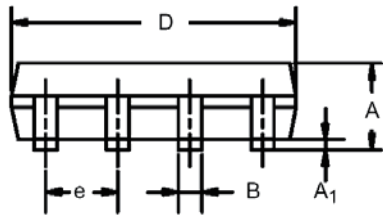

Dim	MILLIMETERS		INCHES	
	Min	Max	Min	Max
A	1.35	1.75	0.053	0.069
A ₁	0.10	0.20	0.004	0.008
B	0.35	0.51	0.014	0.020
C	0.19	0.25	0.0075	0.010
D	4.80	5.00	0.189	0.196
E	3.80	4.00	0.150	0.157
e	1.27 BSC		0.050 BSC	
H	5.80	6.20	0.228	0.244
h	0.25	0.50	0.010	0.020
L	0.50	0.93	0.020	0.037
q	0°	8°	0°	8°

