




P-Channel 20-V (D-S) MOSFET

These miniature surface mount MOSFETs utilize a high cell density trench process to provide low $r_{DS(on)}$ and to ensure minimal power loss and heat dissipation. Typical applications are DC-DC converters and power management in portable and battery-powered products such as computers, printers, PCMCIA cards, cellular and cordless telephones.

- Low $r_{DS(on)}$ provides higher efficiency and extends battery life
- Low thermal impedance copper leadframe SOIC-8 saves board space
- Fast switching speed
- High performance trench technology



PRODUCT SUMMARY		
V_{DS} (V)	$r_{DS(on)}$ m(Ω)	I_D (A)
-20	8.4 @ $V_{GS} = -4.5V$	-20
	10.4 @ $V_{GS} = -2.5V$	-18



ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)				
Parameter		Symbol	Maximum	Units
Drain-Source Voltage		V_{DS}	-20	V
Gate-Source Voltage		V_{GS}	± 8	
Continuous Drain Current ^a	$T_A = 25^\circ\text{C}$	I_D	-20	A
	$T_A = 70^\circ\text{C}$		-17	
Pulsed Drain Current ^b		I_{DM}	± 50	
Continuous Source Current (Diode Conduction) ^a		I_S	-2.1	A
Power Dissipation ^a	$T_A = 25^\circ\text{C}$	P_D	5.0	W
	$T_A = 70^\circ\text{C}$		3.2	
Operating Junction and Storage Temperature Range		T_J, T_{stg}	-55 to 150	$^\circ\text{C}$

THERMAL RESISTANCE RATINGS				
Parameter		Symbol	Maximum	Units
Maximum Junction-to-Ambient ^a	$t \leq 10 \text{ sec}$	$R_{\theta JA}$	25	$^\circ\text{C/W}$
	Steady State		65	$^\circ\text{C/W}$

Notes

- Surface Mounted on 1" x 1" FR4 Board.
- Pulse width limited by maximum junction temperature



SPECIFICATIONS (T _A = 25°C UNLESS OTHERWISE NOTED)						
Parameter	Symbol	Test Conditions	Limits			Unit
			Min	Typ	Max	
Static						
Gate-Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = -250 uA	-0.4			
Gate-Body Leakage	I _{GSS}	V _{DS} = 0 V, V _{GS} = ±8 V			±100	nA
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} = -16 V, V _{GS} = 0 V			-1	uA
		V _{DS} = -16 V, V _{GS} = 0 V, T _J = 55°C			-5	
On-State Drain Current ^A	I _{D(on)}	V _{DS} = -4.5 V, V _{GS} = -10 V	-50			A
Drain-Source On-Resistance ^A	r _{DS(on)}	V _{GS} = -4.5 V, I _D = -13.5 A			8.4	mΩ
		V _{GS} = -2.5 V, I _D = -12 A			10.4	
Forward Tranconductance ^A	g _s	V _{DS} = -15 V, I _D = -11.5 A		70		S
Diode Forward Voltage	V _{SD}	I _S = 2.5 A, V _{GS} = 0 V		-0.6		V
Dynamic ^b						
Total Gate Charge	Q _g	V _{DS} = -10 V, V _{GS} = -4.5 V, I _D = -13.5 A		66		nC
Gate-Source Charge	Q _{gs}			13		
Gate-Drain Charge	Q _{gd}			17		
Turn-On Delay Time	t _{d(on)}	V _{DD} = -10 V, R _L = 6Ω , I _D = -1 A, V _{GEN} = -4.5 V		20		nS
Rise Time	t _r			23		
Turn-Off Delay Time	t _{d(off)}			289		
Fall-Time	t _f			134		

Notes

- Pulse test: $PW \leq 300\mu\text{s}$ duty cycle $\leq 2\%$.
- Guaranteed by design, not subject to production testing.

Package Information

SO-8: 8LEAD

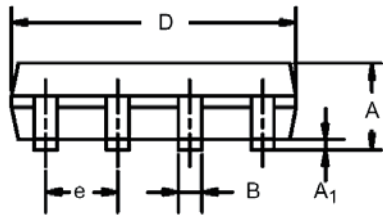

Dim	MILLIMETERS		INCHES	
	Min	Max	Min	Max
A	1.35	1.75	0.053	0.069
A ₁	0.10	0.20	0.004	0.008
B	0.35	0.51	0.014	0.020
C	0.19	0.25	0.0075	0.010
D	4.80	5.00	0.189	0.196
E	3.80	4.00	0.150	0.157
e	1.27 BSC		0.050 BSC	
H	5.80	6.20	0.228	0.244
h	0.25	0.50	0.010	0.020
L	0.50	0.93	0.020	0.037
q	0°	8°	0°	8°

